




Flying Display

95-99%
Visual Transparency


75%
Energy Saving

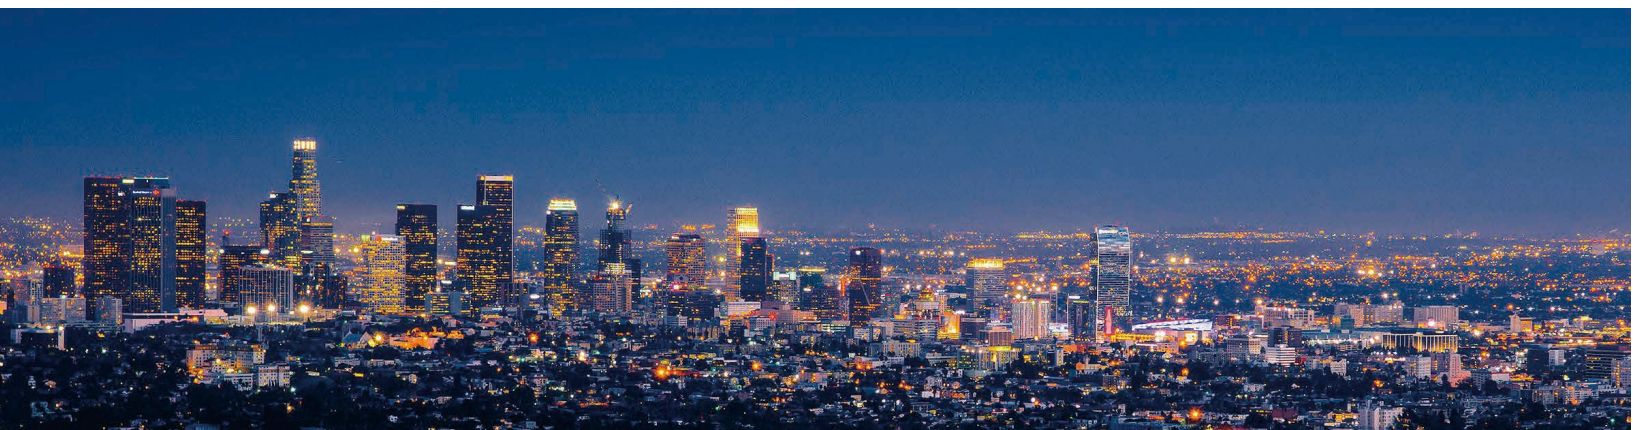

Adjustable high
brightness



High definition
transparent

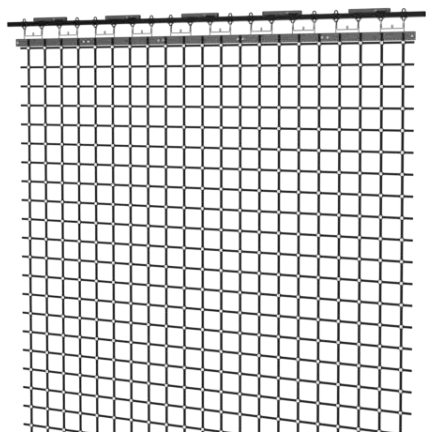

Ultra thin 2mm




Multiple displays



Easy for installation,
Male+Female connect,
plug and Play




Multiple controls

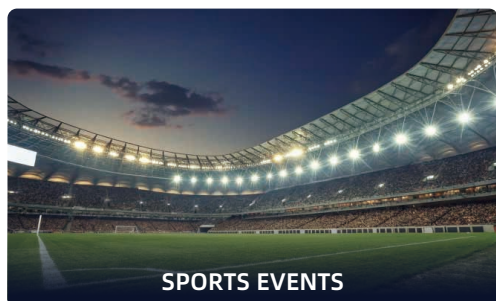

SPORTS EVENTS



CULTURAL LIGHT SHOW

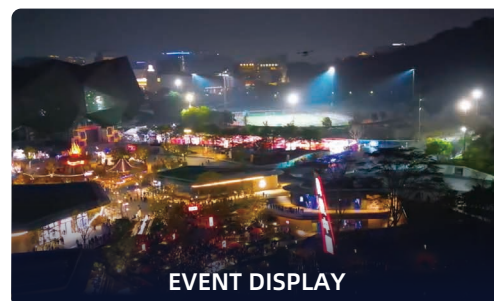

EVENT DISPLAY

Shenzhen Filmbase Technology Co., Ltd.


Email: info@filmbase.cn **Tel:** +86-755-2850-5346

Address: 31F 3A Building, Smart Park, Baolong street, Longgang district, Shenzhen, China




Name	Project	Parameters
LED screen	Screen size	W4.8*H15m
	Resolving Power	P40
	Spacing	40*40mm
	Pixel	300,000 dots
	Input Voltage	DC24V
	Input Type	Lithium battery
	Lamp Bead Packaging	5050
	Drive Mode	Static state
	Refresh Frequency	3840/1920Hz
	Chip Structure	RGB+IC
	System Support	Novastar
	Operation Method	Phone, iPad
	Media Format	Video; images
	Video Format	AVI; MP4; WMV; MOV
	Image Format	JPG; PNG; GIF; BMP
Power battery	Battery name	Ternary lithium battery
	Battery capacity	10.4Ah
	Use group	5 groups
	Cell model	18650
	Charging voltage	25.2V
	Nominal voltage	22.22V
Unmanned aerial vehicle	Expand size	3140*2980*802
	Wing folded size	1140*850*940
	Whole machine weight (including battery)	48.4±0.5 (kg)
	Rated takeo ffweight	98.4±0.5 (kg)
	Maximum takeo ffweight	103.4±0.5 (kg)
	Idle hover time (min)	22 (30000mAh+takeo ffweight 48.4kg)
	Full load hover time (min)	7 (30000mAh+takeo ffweight 48.4kg)
	Suggest height limit	20m
	Suggested speed limit	10m
	Suggested distance limit	1500m
	Image Maximum pitch angleFormat	15°
	Windproof grade	< Level 3

Use expanded state

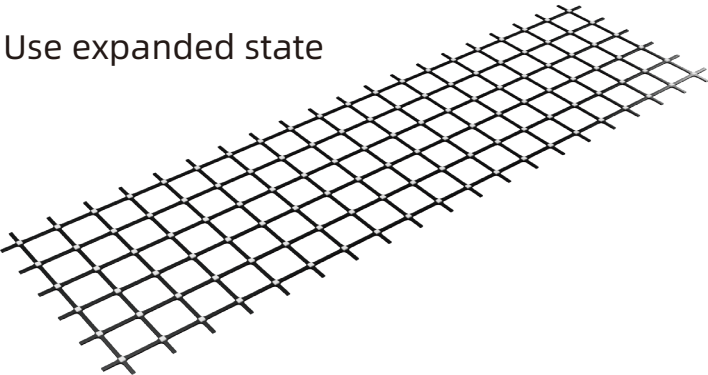

Roll up status

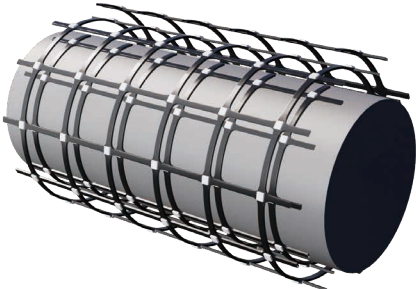

*Color, thickness, size do not represent the actual situation, only for the convenience of the illustration.

