



Window Screen Integrated

>99% | **5W/m²**
Uv Block | Low-Power

 **High-strength aluminum alloy**
Adopting high-strength aluminum alloy door frame, combined with hidden hinge design.


 **Space partition**
Replace thick studded walls with thin partitions or section open floor plans with minimalist solutions.

 **Transparent switching**
The built-in PLCD film can switch between transparent and atomized states, achieving privacy protection and natural lighting.

 **Isolate noise**
Compared with ordinary glass, the anti-noiseability of glass using Filmbase PDLc film is increased by 20%.

 **Safe and durable**
It has excellent insulation, sound insulation, waterproofing, and windproof performance, while also considering safety and durability.

 **Easy to clean**
Eliminate fabric or electronic curtains that are hard to clean and collect germs while affecting designs.

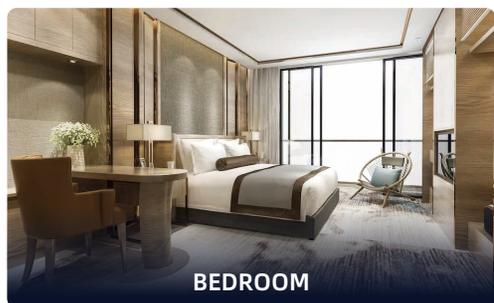

Shenzhen Filmbase Technology Co., Ltd.

Email: info@filmbase.cn **Tel:** +86-755-2850-5346

Address: 31F 3A Building, Smart Park, Baolong street, Longgang district, Shenzhen, China



Product Parameters

Products	Standard glass	Door frame color
120- Window screen integrated	5+5+15a+5 (84 Super White with accessories)	Metallic Gray, Brown, Iron Crystal Black, Sand Gray

Detailed parameters

Material wall thickness: 1.8mm, frame width 120mm, opening fan width 70mm.
 Can do outside open, up hanging, outside flat open up hanging, open fan height within 1500mm, open fan width within 750mm, can do flat door, flat door open fan within 2300mm, flat door activity fan width within 1000mm, the minimum height within 500mm. Hydraulic cushion hinges are required at an additional cost of 150 RMB/pc.

Products	Standard glass	Door frame color
113- Window screen integrated	5+5+15a+5 (84 Super White with accessories)	Metallic Gray, Brown, Iron Crystal Black, Sand Gray

Detailed parameters



Material wall thickness: 2.0mm, frame width 113mm, opening fan width 70mm.
 Can do outside open, up hanging, outside flat open up hanging, open fan height within 1500mm, open fan width within 750mm, can do flat door, flat door open fan within 2300mm, flat door activity fan width within 1000mm, the minimum height within 500mm. Hydraulic cushion hinges are required at an additional cost of 150 RMB/pc.

Optical Parameter

Items	ON/OFF		Test Methods/Standards
Operating voltage	ON	60V	Multimeter/Voltage Regulator,WGW
Power consumption	ON	≤ 5W/m ²	Multi-parameter electric measuring instrument
Viewing angle	ON	≥ 160°	Visual Inspection
Uv blocking rate	OFF	≥ 99%	Optical teansmittance tester
Infrared blocking rate	OFF	≥ 60%	
Response time	OFF→ON	≤ 30 ms	Liquid crystal parameter integrated tester
	ON→OFF	≤ 200 ms	
Operating temperature	--	-30°C ~ 85°C	constant temperature and humidity testing machine
Life-span	--	100000 Hours	GB18910.5-2008
Switching times	--	≥ 2 million times	Self-made on/off tester

Structural

Technical Principles

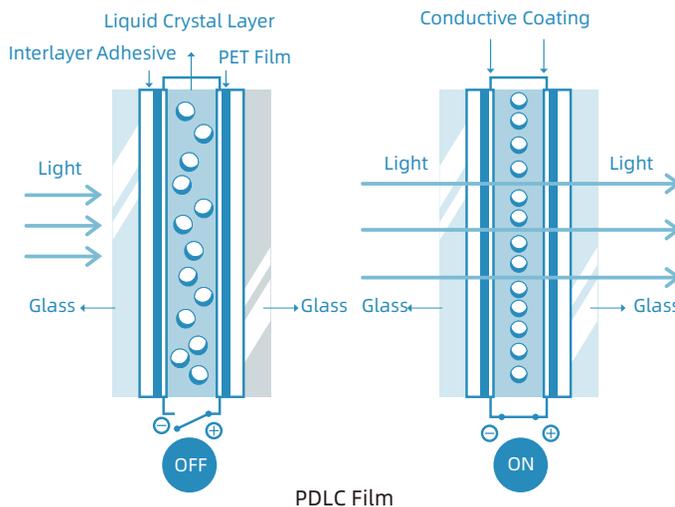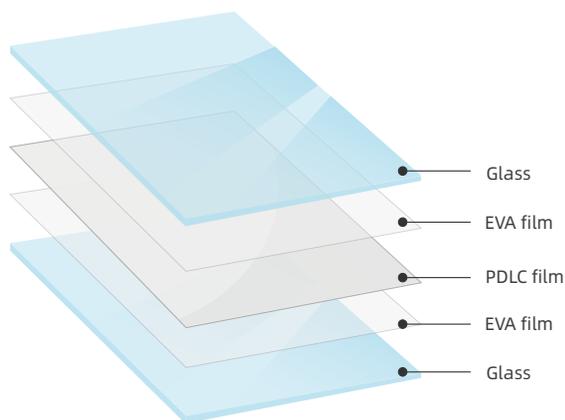

Note: Color and thickness do not represent the actual situation, only for the convenience of illustration.

