



Skyscraper Media Glass

95-99%
Visual Transparency

75%
Energy Saving



Support
customization



160° view angle



Now and future
latest facade



HD + Up to 95%
transparency



Support play 3D
videos, Pictures, letter




See through display,
Glass+display+control
boxall in one



Easy for installation,
Male+Female connect,
plug and Play



Easy for operation,
Intelligent control
support APP,
Computer, USB

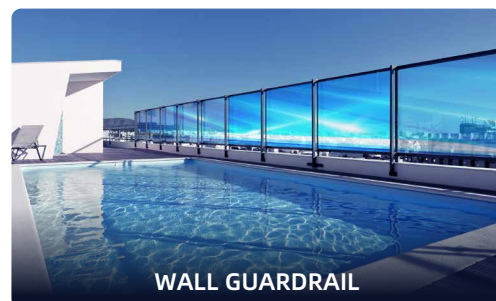

Shenzhen Filmbase Technology Co., Ltd.

Email: info@filmbase.cn **Tel:** +86-755-2850-5346

Address: 31F 3A Building, Smart Park, Baolong street, Longgang district, Shenzhen, China




Product Model

Products	Skyscraper 01	Skyscraper 02	Skyscraper 03
Pitch	P7.98*7.98	P10*10	P20*20
Screen brightness (nits)	0~5000	0~5000	0~3000
Visual transparency	≥95%	≥95%	≥98%
Pixel pitch	8.32×8.32mm	10×10mm	20×20mm
Module	166×498mm	200×500mm	200×500mm
Pixel density	14400	10000	2500
Best view distance	≥8m	≥10m	≥20m
Viewing angle	≥160°	≥160°	≥160°
Average square power	230W	230W	140W
Maximum square power	650W	650W	390W

Product Model

Products	Skyscraper 04	Skyscraper 05	Skyscraper 06
Pitch	P30*30	P50*50	P80*80 or more
Screen brightness (nits)	0~1200	0~600	Consultation Customization
Visual transparency	≥98%	≥99%	≥99%
Pixel pitch	31.25×31.25mm	50×50mm	80×80mm
Module	250×500mm	250×500mm	Consultation Customization
Pixel density	1024	400	156
Best view distance	≥30m	≥50m	≥80m
Viewing angle	≥160°	≥160°	≥160°
Average square power	70W	35W	Consultation Customization
Maximum square power	160W	90W	Consultation Customization

Structural

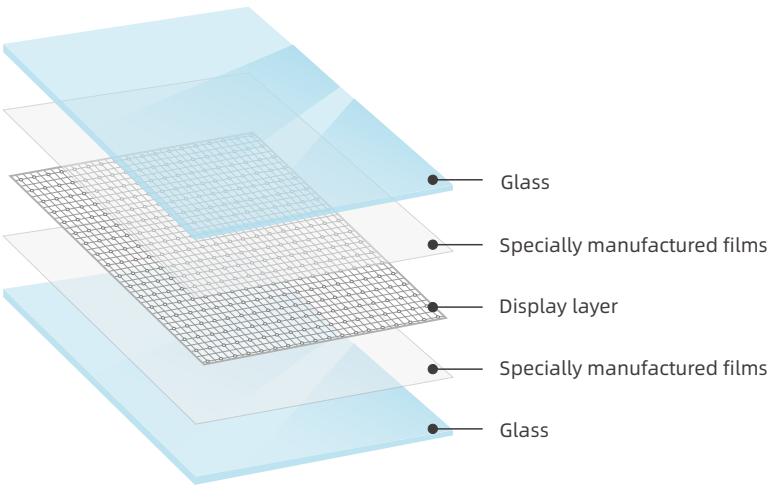

Note: Color and thickness do not represent the actual situation, only for the convenience of illustration.

Technical Parameters

Pixel specification	1R1G1B
Pixel package	SMD2020
Screen material	Tempered Glass
Grayscale level	65536
Refresh rate	≥3840
Brightness adjustment	32X65536
Operating voltage	+5VDC
Working temperature	-20°C~55°C
Storage temperature	-40°C~80°C
Working humidity	10~90%
Storage humidity	5~95%
Control system	Transmitter cards, asynchronous cards, asynchronous playback boxes, video processors

